



inVENTer

inVENTer Nordic

The ventilation seal for clinker brick and ETICS




Nordic for clinker facades




The Nordic exterior closure for inVENTer ventilation systems was specially designed for the special construction of traditional north German clinker facades. It fits flush with the facade and thus preserves the impressive appearance of the clinker brick facade.

- + Narrow ventilation grille fits seamlessly into the clinker brick facade
- + For all common inVENTer ventilation systems
- + Uncomplicated installation thanks to the integrated slope
- + Available in the standard colors white, gray, dark gray, anthracite and, on request, in individual RAL colors


Example: iV14-Zero with Nordic external closure | Clinker facade

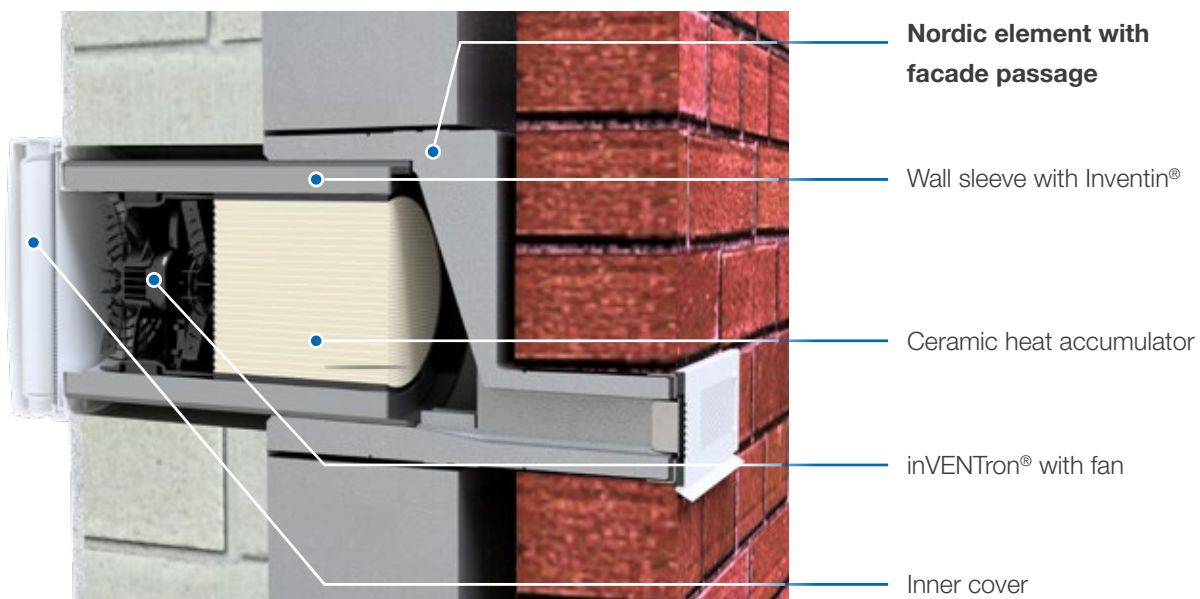


Complete sets with Nordic external closure



iV14-Zero Nordic
Sound insulation fan

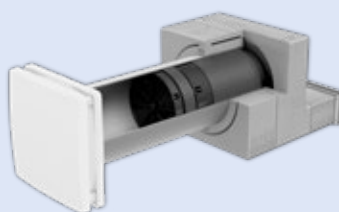

iV-Smart+ Nordic
Compact fan

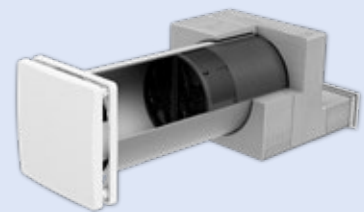

iV-Twin+ Nordic
Single room ventilation



Nordic for thermal insulation composite systems




Discreetly decentralized: Even in the thermal insulation composite system, the narrow ventilation grille of the Nordic blends discreetly into the look of the facade. Thanks to the integrated slope and the fact that it can easily be shortened depending on insulation thickness, the ventilation seal ensures uncomplicated installation. For efficient ventilation of buildings with insulating facades.

- + Narrow ventilation grille fits seamlessly into the facade
- + Can be used flexibly for different insulation thicknesses
- + For all common inVENTer ventilation systems
- + Available in the standard colors white, gray, dark gray, anthracite and, on request, in individual RAL colors


Example: iV14-Zero with Nordic external closure | ETICS

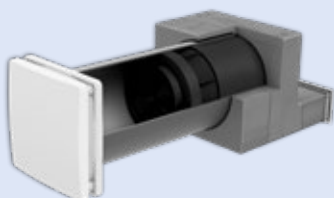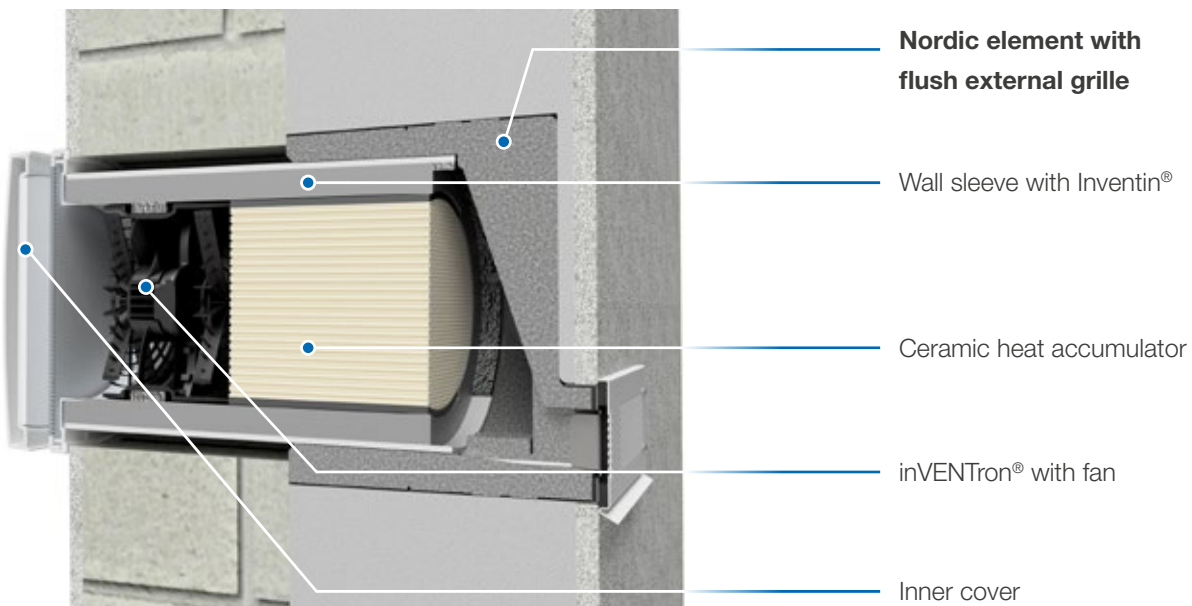

iV14-MaxAir Nordic
Strong performance plus

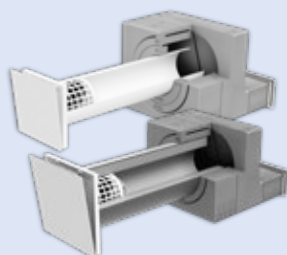

aV100/160/200 ALD Nordic
Wall vent



aV100 Nordic
For exhaust air systems

Standard sound level difference:

iV14-Zero Nordic	49 – 55 dB
iV-Smart+ Nordic	42 – 51 dB
iV-Twin+ Nordic	45 – 53 dB
iV14-MaxAir Nordic	46 – 53 dB
aV100 ALD Nordic	51 – 53 dB
aV160 ALD Nordic	52 dB
aV200 ALD Nordic	56 dB

The remaining technical values correspond to those of the main products.

inVENTer GmbH
Ortsstraße 4a
D-07751 Löberschütz
Phone: +49 (0) 36427 211-0
Fax: +49 (0) 36427 211-113
E-mail: info@inventer.de
Web: www.inventer.eu

